


# Serie / Série / Series 88



Typ: Tri-Clamp Anschluss ½" - 2"  
 Type: Raccord Tri-Clamp ½" - 2"  
 Type: Tri-Clamp connection ½" - 2"

DIN 32676 series A

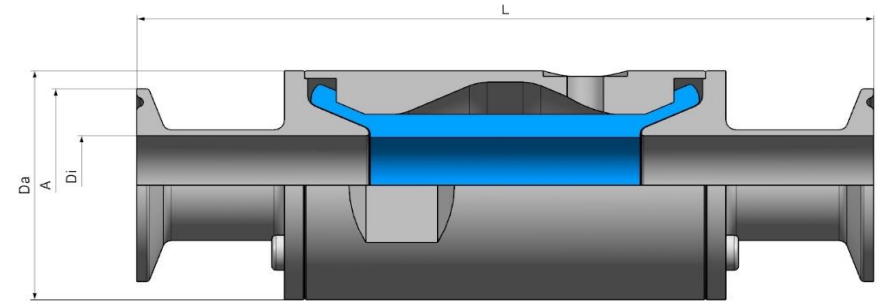

DN	Di	A	L	Da	C	Vol. l <sup>3</sup>	kg
15	16	34	136.2	44	G ½"	0.04	0.40
20	20	34	146.2	55	G ½"	0.05	0.55
25	26	50.5	174.6	60	G ½"	0.07	0.85
32	32	50.5	159	73	G ½"	0.10	1.15
40	38	50.5	168	83	G ½"	0.13	1.45
50	50	64	202	99	G ½"	0.28	2.40

Vol. l<sup>3</sup> = Steuervolumen bei geschlossenem Ventil  
 Vol. l<sup>3</sup> = Volume de commande lorsque la vanne est fermée  
 Vol. l<sup>3</sup> = Control volume for closed valve

Teile Materialspezifikation	pièces spécification des matériaux	parts material specifications
<b>Gehäuse, nicht medienberührend</b> Aluminium 6026 farblos eloxiert	<b>Corps, sans contact avec le produit</b> alliage d'aluminium 6026 anodisé incolore	<b>Housing, not in contact with medium</b> aluminium alloy 6026 colourless anodised
<b>Tri-Clamp Anschluss</b> Edelstahl 1.4404/1.4435	<b>raccord Tri-Clamp</b> acier inoxydable 1.4404/1.4435	<b>Tri-Clamp connection</b> stainless steel 1.4404/1.4435
<b>Schrauben</b> Edelstahl A4	<b>Vis</b> Inox A4	<b>Screws</b> stainless steel A4
<b>Schlauchmanschette</b> nach Wahl	<b>Manchon tubulaire flexible</b> au choix	<b>Sleeve</b> as selected

Art.Nr. / art. no.		Schlauchmanschetten-Qualität / Qualité de Manchon / Sleeve quality								Standard
DN	Ventil Vanne Valve	NR	NR-L	NR-LH	NBR-LH	EPDM-L	FPM	CR	CSM	
15	88015.									000
20	88020.	001.	011.	021.	121.	212.	303.	401.	501.	
25	88025.									
32	88032.									000
40	88040.	NR-E		NR-LE	NBR-LE	EPDM-LE				
50	88050.	ATEX		031.	061.	161.	261.			

### Bestellbeispiele / exemples de commande / example orders

Ventil komplett / vanne complète / complete valve: 88040.212.000  
 Schlauchmanschette / manchon / sleeve: 8040.212.000