



# Magnetic Inductive Flow Meter

all-metal design

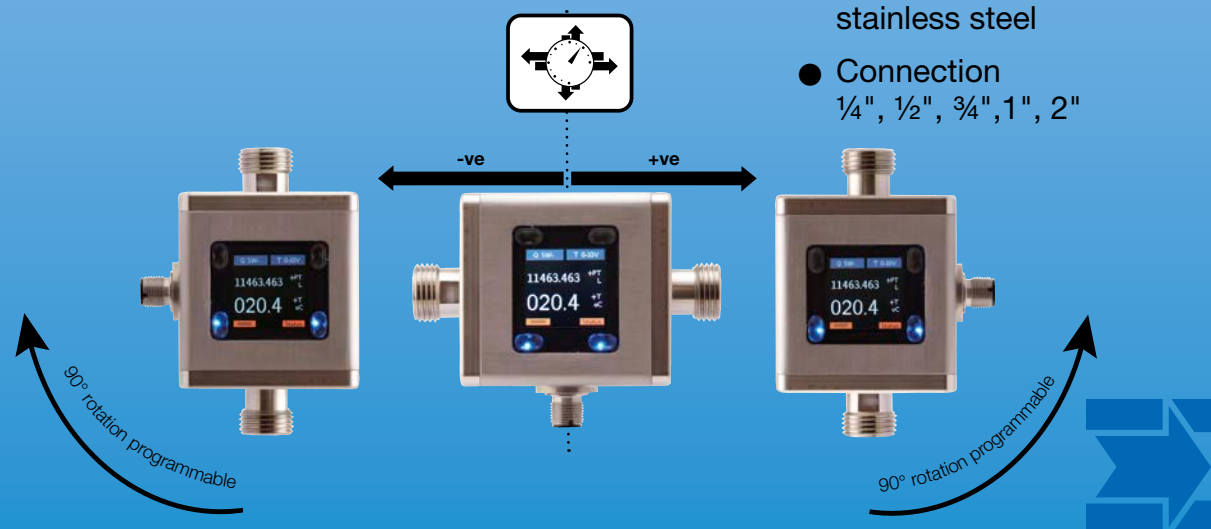


measuring  
•  
monitoring  
•  
analysing

MIM

## IO-Link

- For measuring and monitoring of conductive liquids
- Accuracy:  
 $< \pm (0.8\% \text{ of reading} + 0.5\% \text{ of full scale})$
- Flow and temperature measurement
- Monitoring, transmitter function, dosing
- Bidirectional measuring
- $p_{\max}: 16 \text{ bar}; t_{\max}: 140^\circ\text{C}$
- All-metal design: stainless steel
- Connection  
 $\frac{1}{4}"$ ,  $\frac{1}{2}"$ ,  $\frac{3}{4}"$ ,  $1"$ ,  $2"$



CS

KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
Head Office:  
+49(0)6192 299-0  
+49(0)6192 23398  
info.de@kobold.com  
www.kobold.com



### Description

The new flow meter MIM was developed for measuring and monitoring smaller- and medium-sized flow of conductive liquids in pipes.

The device operates according to the electromagnetic measurement principle. According to Faraday's Law of magnetic induction, a voltage is induced in a conductor moving through a magnetic field. The electrically conductive measuring agent acts as the moved conductor. The voltage induced in the measuring agent is proportional to the flow velocity and is therefore a value for the volumetric flow. The flowing media must have a minimum conductivity. The induced voltage is picked up by two sensing electrodes which are in contact with the measuring agent and sent to the measuring amplifier.

The flow rate will be calculated based on the cross sectional area of the pipe.

The measurement is not depending on the process liquid and its material properties such as density, viscosity and temperature. Two given outputs can be set to be switch, analogue or frequency. Also a dosing function can be selected, where output 1 is set as switch NPN/ PNP/ PP and output 2 is set as control input.

### Significant Characteristics

- Stainless steel design
- Flow- and temperature measurement
- Monitoring, dosing and transmitter function
- Dosing function with external control input
- Coloured, multi-parameter configurable TFT-display, rotatable in 90° steps
- Bidirectional measuring
- Intuitive setup menu via 4 optical touch keys
- 2 configurable outputs (pulse-/frequency-/alarm- and analogue output)
- Grand and resettable totaliser
- Drinking water approval

### Technical Details

|                                                                    |                                                                   |
|--------------------------------------------------------------------|-------------------------------------------------------------------|
| Measurement process:                                               | electromagnetic                                                   |
| Range:                                                             | see order details                                                 |
| Media:                                                             | conductive fluids                                                 |
| Minimum conductivity:                                              | $\geq 20 \mu\text{S/cm}$                                          |
| Max. pressure:                                                     | 16 bar                                                            |
| Accuracy:                                                          | $< \pm(0.8\% \text{ of reading} + 0.5\% \text{ of full scale})^*$ |
| Repeatability:                                                     | $\pm 0.2\% \text{ of full scale}$                                 |
| Response time flow $t_{90}$<br>(alarm/pulse/<br>frequency output): | $< 100 \text{ ms}$                                                |
| (analogue output):                                                 | $< 1 \text{ s}$                                                   |

### Temperature measurement

|                                                        |                                                        |
|--------------------------------------------------------|--------------------------------------------------------|
| Sensor:                                                | PT1000                                                 |
| Accuracy:                                              | $\leq \pm 2^\circ\text{C}$ (flow $> 0.2 \text{ m/s}$ ) |
| Measuring range:                                       | temperature range of medium                            |
| Response time temperature $t_{90}$<br>(signal output): | $< 20 \text{ s}$                                       |
| Mounting position:                                     | in all directions                                      |
| In-/outlet:                                            | 3x DN/2x DN                                            |
| Pressure drop:                                         | see pressure loss diagram                              |
| Operation:                                             | 4 optical touch sensors,<br>useable with hand gloves** |
| Housing:                                               | stainless steel 1.4404,<br>display screen PMMA         |

### Wetted parts

The wetted parts of MIM-13\*\*\* are in conformance with DVGW 270 and WRAS guidelines for drinking water approval.

\*\*\* except measuring range code "35"

|                     |                        |
|---------------------|------------------------|
| Connection fitting: | stainless steel 1.4404 |
| Insulation parts:   | PEEK                   |
| Electrodes:         | stainless steel 1.4404 |
| Seals:              | FKM (Option: EPDM)     |
| Protection:         | IP 67                  |

\* Under reference conditions: media temperature:  $15^\circ\text{C} \dots 30^\circ\text{C}$ , 1 cSt,  
500  $\mu\text{S/cm}$ , 1 bar  
ambience temperature:  $15^\circ\text{C} \dots 30^\circ\text{C}$

\*\* Limited functionality with black rubber gloves

## Technical Details (continued)

### Temperature ranges

| Design                         | Electronics       | Model            | Seals material | Media temperature               | Ambient temperature                     |
|--------------------------------|-------------------|------------------|----------------|---------------------------------|-----------------------------------------|
| compact version                | C3T               | MIM-12<br>MIM-13 | FKM            | -20 °C ... +70 °C <sup>2)</sup> | -20 °C ... +60 °C                       |
|                                |                   |                  | EPDM           |                                 |                                         |
| remote version<br>(PVC cable)  | P02 <sup>1)</sup> | MIM-12<br>MIM-13 | FKM            | -20 °C ... +85 °C               | -20 °C ... +60 °C (display electronics) |
|                                |                   |                  | EPDM           |                                 | -20 °C ... +85 °C (sensor)              |
| remote version<br>(ETFE cable) | E02 <sup>1)</sup> | MIM-12           | FKM            | -20 °C ... +140 °C              | -20 °C ... +60 °C (display electronics) |
|                                |                   |                  |                |                                 | -20 °C ... +140 °C (sensor)             |
|                                |                   | MIM-13           | EPDM           | -40 °C ... +140 °C              | -20 °C ... +60 °C (display electronics) |
|                                |                   |                  |                |                                 | -40 °C ... +140 °C (sensor)             |

<sup>1)</sup> Cable length: 02 = 2 m, 05 = 5 m, 10 = 10 m, 15 = 15 m, 20 = 20 m

<sup>2)</sup> Continuous -20 °C ... +70 °C, short-term up to max. +85 °C (for max. 60 minutes at max. +40 °C ambient temperature and repetition earliest after 4 hours).  
Use of the electrical outputs remains limited to temperature range -20 °C ... +70 °C.

### Electrical data

|                          |                                                                                                                                                     |                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Supply voltage:          | 19-30 V <sub>DC</sub> , internal power consumption max. 200 mA                                                                                      | Electrical connection: plug M12x1, 4-pin                            |
| Display:                 | TFT display, 128x128 pixels, 1.4" display orientation in 90° steps adjustable                                                                       | Shock resistance<br>DIN EN 60068-2-27:2010: 20 g (11 ms)            |
| Display repetition rate: | 0.5 ... 10 s, adjustable                                                                                                                            | Vibration resistance<br>DIN EN 60068-2-6:2008: 5 g (10 ... 2000 Hz) |
| Pulse output             | Push-Pull, freely scalable, configurable for partial and accumulated totaliser                                                                      | Environmental testing<br>DIN EN 60068-2-30:2006: severity level b   |
| Frequency output         | Push-Pull, freely scalable, 2 kHz @ overflow<br>$f_{min}$ @ FS = 50 Hz<br>$f_{max}$ @ FS = 1000 Hz                                                  |                                                                     |
| Alarm output:            | NPN, PNP, Push-Pull, configurable max. 30 V <sub>DC</sub> , max. 200 mA short-circuit proof                                                         |                                                                     |
| Analogue output:         | active, 3 wire, 0(4)-20 mA, max. load 500 Ω or 0(2)-10 V <sub>DC</sub> , (R <sub>i</sub> = 500 Ω)                                                   |                                                                     |
| Control input:           | active signal U <sub>high</sub> max. 30 V <sub>DC</sub><br>0 < Low < 10 V <sub>DC</sub><br>15 V <sub>DC</sub> < High < Vs                           |                                                                     |
| Dosing function:         | Dosing output OUT2:<br>Push-Pull, High active<br>Control input OUT1:<br>START/STOP 0.5 s < t <sub>high</sub> < 4 s<br>RESET t <sub>high</sub> > 5 s |                                                                     |



## Magnetic Inductive Flow Meter in all-metal design Model MIM

### Connection/ranges

| Connection | Inside diameter (DN)    | Range                                |
|------------|-------------------------|--------------------------------------|
| G ¼        | 2.4 x 3 mm              | 0.01 ... 1 l/min                     |
| G ½        | 5 mm                    | 0.03 ... 3 l/min / 0.04 ... 10 l/min |
| ½" NPT     | 5 mm                    | 0.48 ... 48 GPH / 0.01 ... 2.6 GPM   |
| G ¾        | 10 mm                   | 0.1 ... 25 l/min / 0.2 ... 50 l/min  |
| ¾" NPT     | 10 mm                   | 0.025 ... 6.6 GPM / 0.05 ... 13 GPM  |
| G 1        | 15 mm                   | 0.2 ... 50 l/min / 0.4 ... 100 l/min |
| 1" NPT     | 15 mm                   | 0.05 ... 13 GPM / 0.1 ... 26 GPM     |
| G 2        | see dimensional drawing | 1,5 ... 350 l/min / 3 ... 650 l/min  |
| 2" NPT     | see dimensional drawing | 0,4 ... 90 GPM / 0,8 ... 170 GPM     |


### Configuration of outputs

| Output 1 (OUT1, PIN 4)        | Output 2 (OUT2, PIN 2)      |
|-------------------------------|-----------------------------|
| Analogue output 4-20 mA       | Analogue output 4-20 mA     |
| Analogue output 0-20 mA       | Analogue output 0-20 mA     |
| Analogue output 2-10 V        | Analogue output 2-10 V      |
| Analogue output 0-10 V        | Analogue output 0-10 V      |
| Switching output NPN/PNP/PP   | Switching output NPN/PNP/PP |
| Pulse output PP               | Pulse output PP             |
| Frequency output PP           | Frequency output PP         |
| Communication mode KofiCom    |                             |
| Communication mode IO-Link    |                             |
| Control input                 |                             |
| Control input dosing function | Dosing output               |

### IO-Link specification

Manufacturer ID: 1105 (decimal), 0 x 0451 (hex)  
 Manufacturer name: Kobold Messring GmbH  
 IO-Link specification: V1.1  
 Bitrate: COM3  
 Minimal cycle time: 1,1 ms  
 SIO-Mode: yes (OUT1 in configuration IO-Link)  
 Block parameterisation: yes  
 Operational readiness: 10 s  
 Max. cable length: 20 m
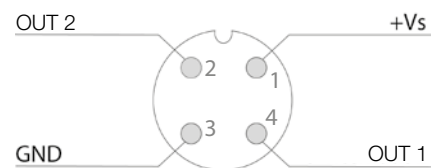
### Electrical Connection MIM-...C3T



**Order Details** (Example: MIM-12 15H G5 C3T 0)

| Model                                                                                                                                  | Range                                                                                     | Connection                | Electronics                                                                                                                                                                                                                                                                                                            | Special version                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>MIM-12</b> = housing/<br>electrode<br>VA, FKM<br>seal<br><br><b>MIM-13<sup>4)</sup></b> = housing/<br>electrode<br>VA, EPDM<br>seal | <b>01H<sup>1)</sup></b> = 0.01 ... 1 l/min<br><b>01G<sup>2)</sup></b> = 0.16 ... 16 GPH   | <b>G2</b> = G ¼ male      | <b>C3T</b> = compact, TFT display,<br>2 outputs (current/voltage/<br>pulse/frequency/alarm output<br>configurable), M12x1 plug<br><br><b>P02<sup>3)</sup></b> = remote version, TFT display,<br>2 m PVC cable, max. 85 °C<br><br><b>E02<sup>3)</sup></b> = remote version, TFT display,<br>2 m ETFE cable, max. 140 °C | <b>0</b> = without<br><br><b>K<sup>5)</sup></b> = including<br>calibration<br>report |
|                                                                                                                                        | <b>03H<sup>1)</sup></b> = 0.03 ... 3 l/min<br><b>05H<sup>1)</sup></b> = 0.04 ... 10 l/min | <b>G4</b> = G ½ male      |                                                                                                                                                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                        | <b>03G<sup>2)</sup></b> = 0.48 ... 48 GPH<br><b>05G<sup>2)</sup></b> = 0.01 ... 2.6 GPM   | <b>N4</b> = ½" NPT female |                                                                                                                                                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                        | <b>10H<sup>1)</sup></b> = 0.1 ... 25 l/min<br><b>15H<sup>1)</sup></b> = 0.2 ... 50 l/min  | <b>G5</b> = G ¾ male      |                                                                                                                                                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                        | <b>10G<sup>2)</sup></b> = 0.025 ... 6.6 GPM<br><b>15G<sup>2)</sup></b> = 0.05 ... 13 GPM  | <b>N5</b> = ¾" NPT female |                                                                                                                                                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                        | <b>15H<sup>1)</sup></b> = 0.2 ... 50 l/min<br><b>20H<sup>1)</sup></b> = 0.4 ... 100 l/min | <b>G6</b> = G 1 male      |                                                                                                                                                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                        | <b>15G<sup>2)</sup></b> = 0.05 ... 13 GPM<br><b>20G<sup>2)</sup></b> = 0.1 ... 26 GPM     | <b>N6</b> = 1" NPT female |                                                                                                                                                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                        | <b>35H<sup>1)</sup></b> = 1.5 ... 350 l/min<br><b>40H<sup>1)</sup></b> = 3 ... 650 l/min  | <b>G9</b> = G 2 male      |                                                                                                                                                                                                                                                                                                                        |                                                                                      |
|                                                                                                                                        | <b>35G<sup>2)</sup></b> = 0.4 ... 90 GPM<br><b>40G<sup>2)</sup></b> = 0.8 ... 170 GPM     | <b>N9</b> = 2" NPT female |                                                                                                                                                                                                                                                                                                                        |                                                                                      |

<sup>1)</sup> l/min-package (nameplate (l/min or ml/min, °C, bar)), calibrated range and temperature °C


<sup>2)</sup> GPM-package (nameplate (GPM or GPH, °F, PSI)), calibrated range and temperature °F

<sup>3)</sup> Cable length 02 = 2 m, 05 = 5 m, 10 = 10 m, 15 = 15 m, 20 = 20 m. Wall mounting brackets (brackets incl. accessories) is included in the scope of delivery.









<sup>5)</sup> Number of measuring points (standard): 5

**Accessories (Spare part)**

| Description                                                                             | Model          | Image                                                                                |
|-----------------------------------------------------------------------------------------|----------------|--------------------------------------------------------------------------------------|
| Stainless steel wall mounting kit for remote version (2 brackets, without nuts/washers) | ERS-ZOK-023618 |  |











| Description                                                                             | Model         | Dimensions [mm]                                                                      | Image                                                                                 |
|-----------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Clamping bracket set for wall mounting (stainless steel with partial polyolefin sleeve) | ZUB-MIM225128 |  |  |

Order Details MIM Fitting Sets Accessory Kits\*

| Accessory kit number | Meter/<br>Process<br>connection | Fitting set type     | Dimensions [mm]                                                                                            | Image                                                                                 |
|----------------------|---------------------------------|----------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| ZUB-AD2U15P08        | G ½ cap nut/<br>¼" NPT male     | Cap nut and<br>union |    |    |
| ZUB-AD2G08P08        | G ¼ female/<br>¼" NPT male      | Adapter              |    |    |
| ZUB-AD2G15P15        | G ½ female/<br>½" NPT male      | Adapter              |   |   |
| ZUB-AD2G15N08        | G ½ female/<br>¼" NPT female    | Adapter              |  |  |
| ZUB-AD2G15N15        | G ½ female/<br>½" NPT female    | Adapter              |  |  |
| ZUB-AD2U20P15        | G ¾ cap nut/<br>½" NPT male     | Cap nut and<br>union |  |  |
| ZUB-AD2G20P20        | G ¾ female/<br>¾" NPT male      | Adapter              |  |  |
| ZUB-AD2G20N15        | G ¾ female/<br>½" NPT female    | Adapter              |  |  |

\* **Note:** All fitting kits include 2 x Klinger SIL® flat sealing gaskets

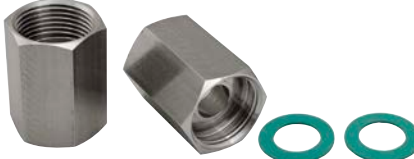
**Order Details MIM Fitting Sets Accessory Kits\*** (continued)

| Accessory kit number | Meter/<br>Process<br>connection  | Fitting set type  | Dimensions [mm]                                                                                                    | Image                                                                                 |
|----------------------|----------------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| ZUB-AD2G20N20        | G 3/4 female/<br>3/4" NPT female | Adapter           |                                   |    |
| ZUB-AD2U25P15        | G 1 cap nut/<br>1/2" NPT male    | Cap nut and union |                                   |    |
| ZUB-AD2U25P20        | G 1 cap nut/<br>3/4" NPT male    | Cap nut and union |                                  |   |
| ZUB-AD2G25N15        | G 1 female/<br>1/2" NPT female   | Adapter           |                                 |  |
| ZUB-AD2G25N20        | G 1 female/<br>3/4" NPT female   | Adapter           |                                 |  |
| ZUB-AD2G25N25        | G 1 female/<br>1" NPT female     | Adapter           |                                 |  |
| ZUB-AD2G25T25        | G 1 female/<br>1" Tri-Clamp®     | Adapter           |   |  |
| ZUB-AD2G50T50        | G 2 female/<br>2" Tri-Clamp®     | Adapter           |  |  |

\* **Note:** All fitting kits include 2 x Klinger SIL® flat sealing gaskets or 2 x FKM O-rings (for ZUB-AD2G50T50)



## Pressure Loss

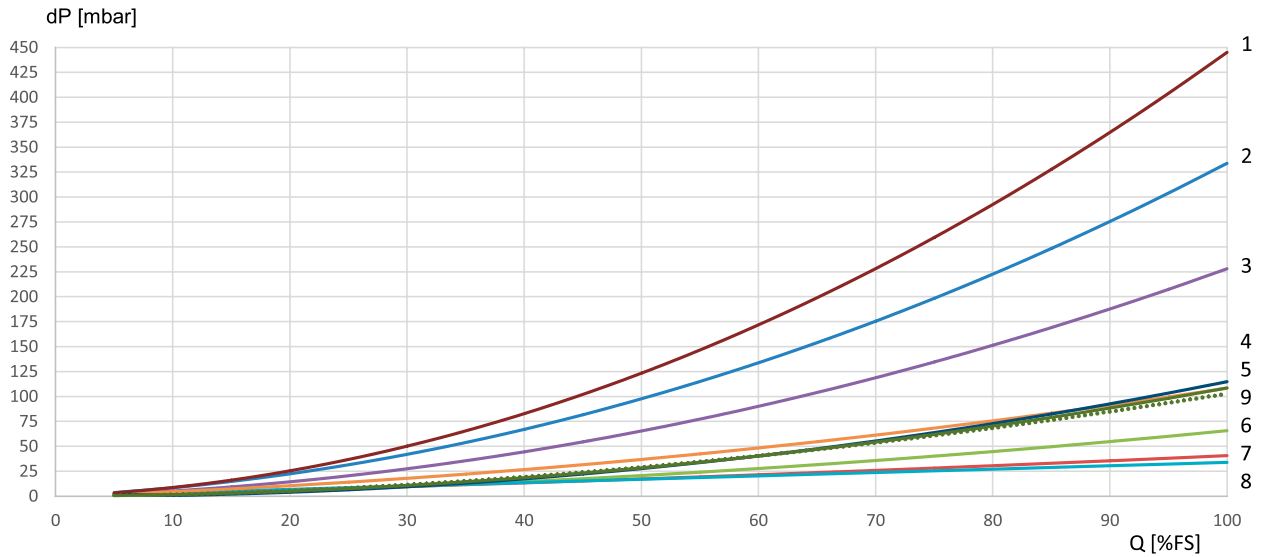


- ① MIM-1x40xx9
- ② MIM-1x05xx4
- ③ MIM-1x15xx5
- ④ MIM-1x35xx9
- ⑤ MIM-1x20xx6
- ⑥ MIM-1x10xx5
- ⑦ MIM-1x03xx4
- ⑧ MIM-1x15xx6
- ⑨ MIM-1x01xx3








Dimensions [mm]  
Compact version

|     |
|-----|
| G   |
| 1/4 |
| 1/2 |
| 3/4 |
| 1   |

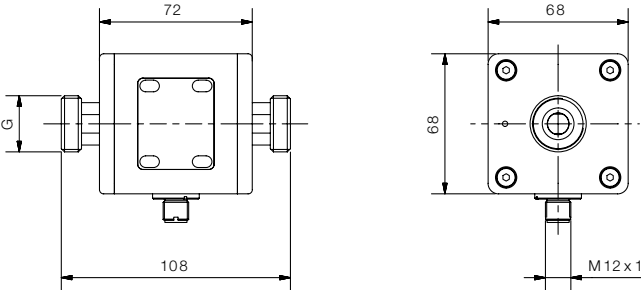


|     |
|-----|
| NPT |
| 1/2 |
| 3/4 |
| 1   |

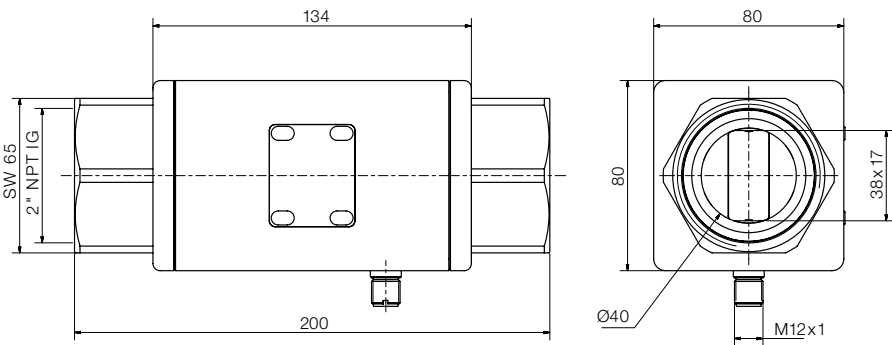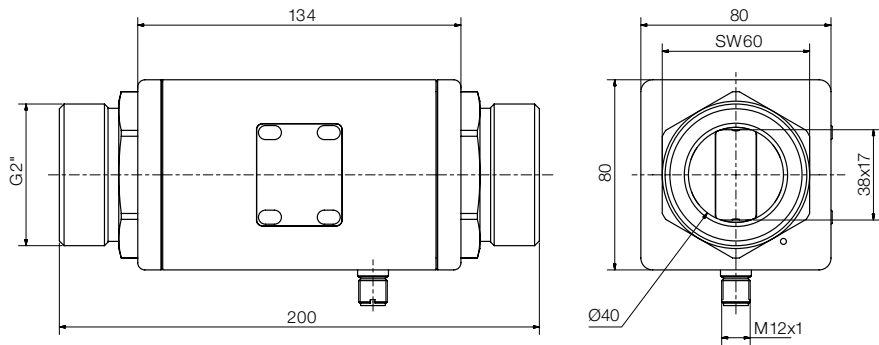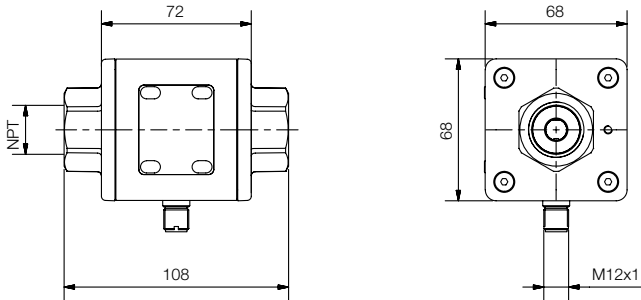


**Dimensions [mm] (continued)**

**Remote version**

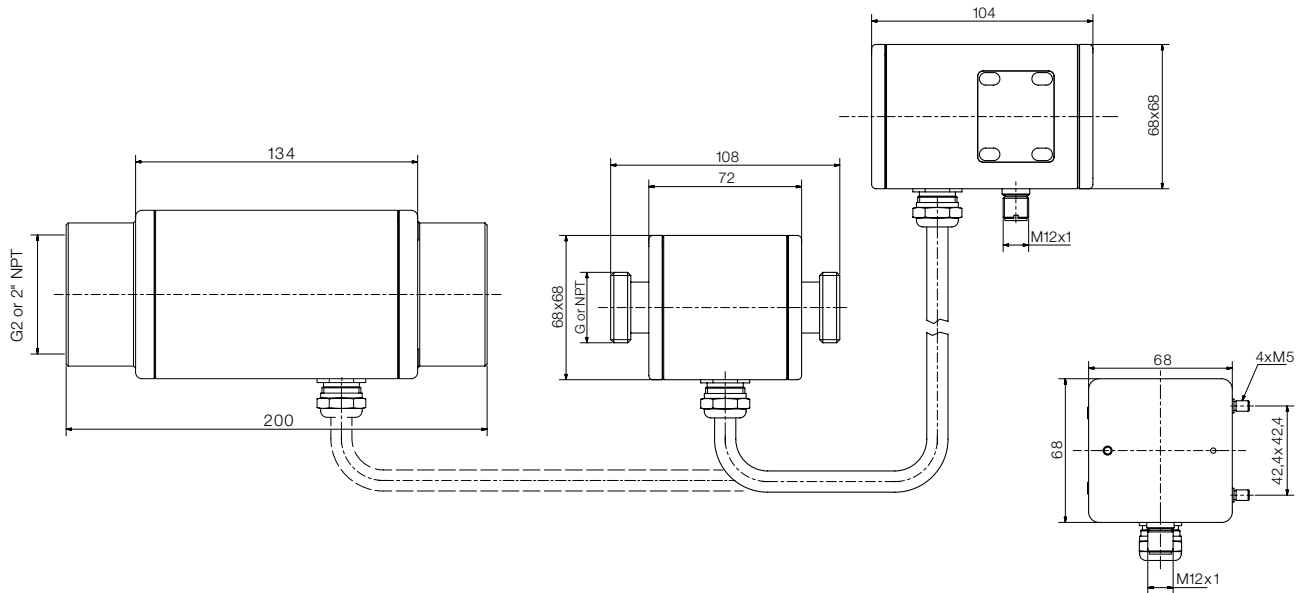Without wall mounting brackets




With wall mounting brackets

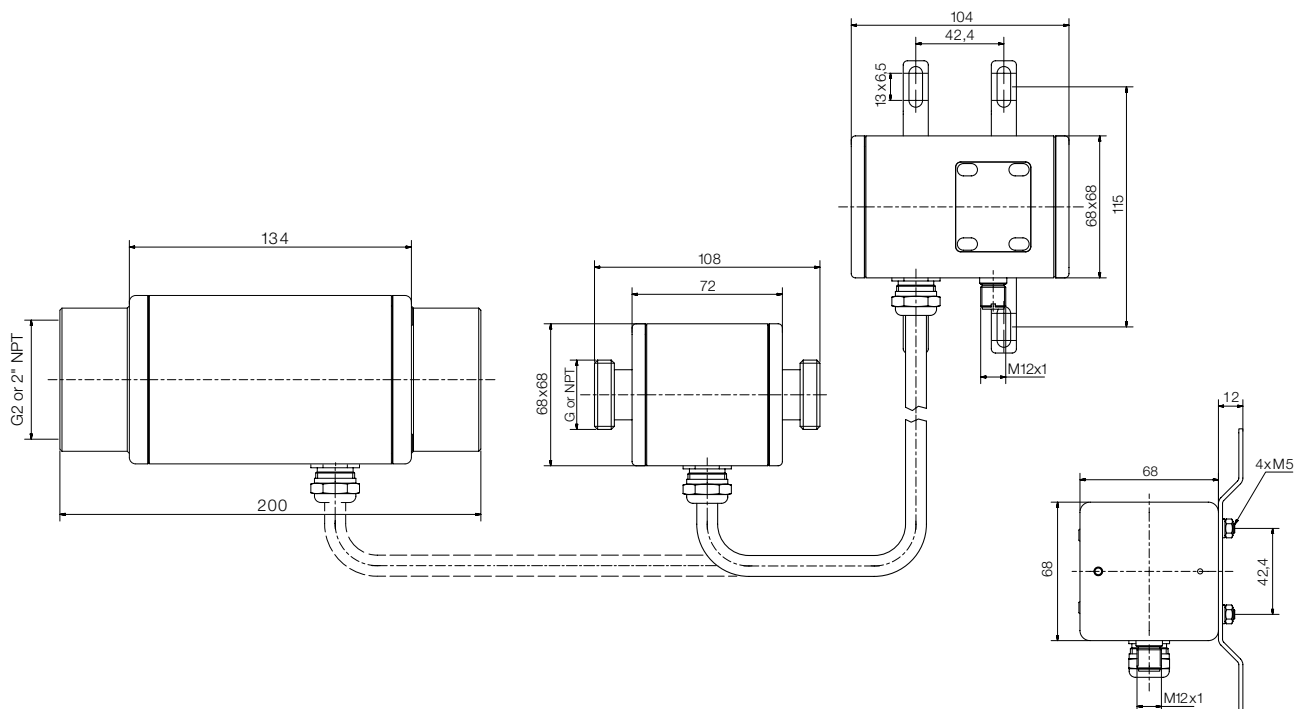



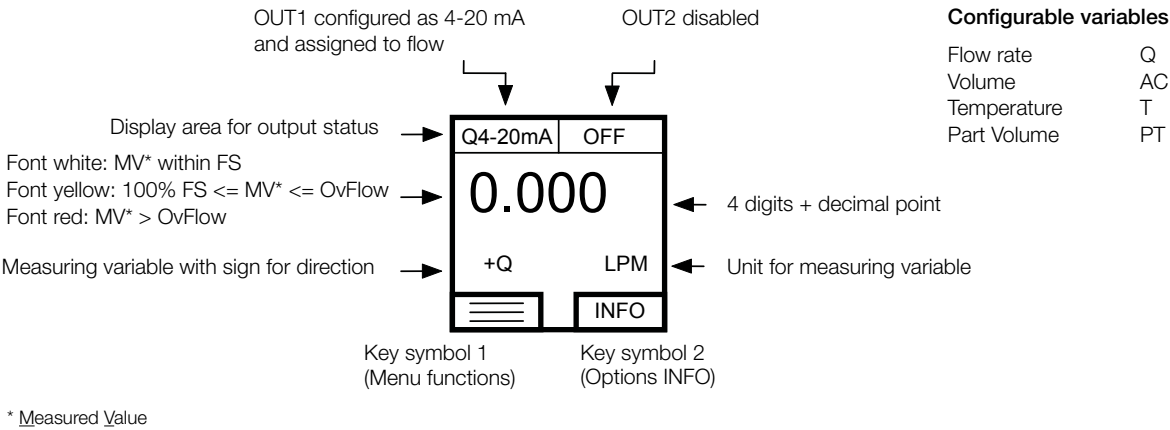Measuring Mode, Display Layout »Single« configurable



Measuring Mode, Display Layout »Dual« configurable

