



S130 / S132



Laser Particle Counter



ECO ($0.3 < d \leq 5.0 \mu\text{m}$)

S130



S132

PRO ($0.1 < d \leq 5.0 \mu\text{m}$)



PARTICLE MEASUREMENT
According to ISO-8573 Standard




EASY INSTALLATION
Plug and Play Solution



PRO VERSION S132
Smallest channel $0.1 < d \leq 0.5 \mu\text{m}$



ECO VERSION S130
Smallest channel $0.3 < d \leq 0.5 \mu\text{m}$

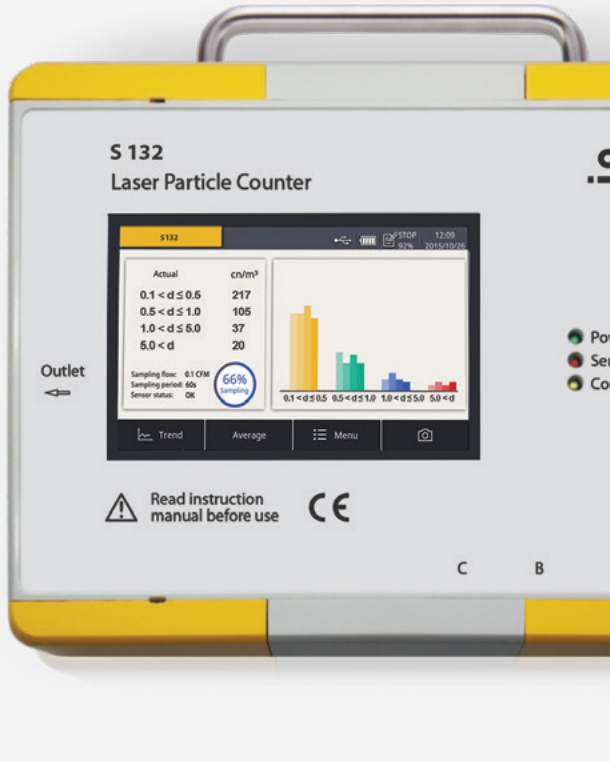

Benefits

- ✓ Accurate compressed air quality measurements and monitoring with particle size ranges:
0.1 < d ≤ 0.5 μm / 0.5 < d ≤ 1.0 μm / 1.0 < d ≤ 5.0 μm / d > 5.0 μm
- ✓ Classify the compressed air systems according to ISO 8537-1 while being in compliance with the ISO 8573-4
- ✓ Easy connection to compressed air system through a 6 mm hose with quick connectors
- ✓ Integrated pressure diffuser suitable for inlet pressure ranges of 3 ... 15 bar(g)
- ✓ Optional 5" touch screen integrated for live data readings and data logging functions
- ✓ Designed to be used in stationary monitoring solutions, as well as in portable audit measurements

Reliable particulates counts in compressed air systems

The SUTO S130 / S132 Laser Particle Counters are optimized for 24/7 compressed air quality monitoring. Unlike its competition, the SUTO laser particle counters are coming with integrated pressure diffusers to reduce the line pressure inside the instrument. Users are enabled to use the laser particle counters directly at the compressed air system, without installing pressure reducers and therefore being in compliance with the ISO 8573-4 standard.


The measurement values are displayed in counts per volume (cn/m3), but can also display alternative volume units like cubic-feet or liter.

The integrated display offers live readings for all channels, signal output settings as well as an integrated data logger, to store the measurement data on the device.

Applications

Particle free compressed air is not an easy task to be achieved. Monitoring is a must in many industries and applications to avoid contamination in products and health risks for humans.

- Medical air
- Pharmaceuticals
- Breathable air for rescue workers and divers
- Food and beverage
- Semiconductor fabs
- Conveyance of hygroscopic food
- High tech processes

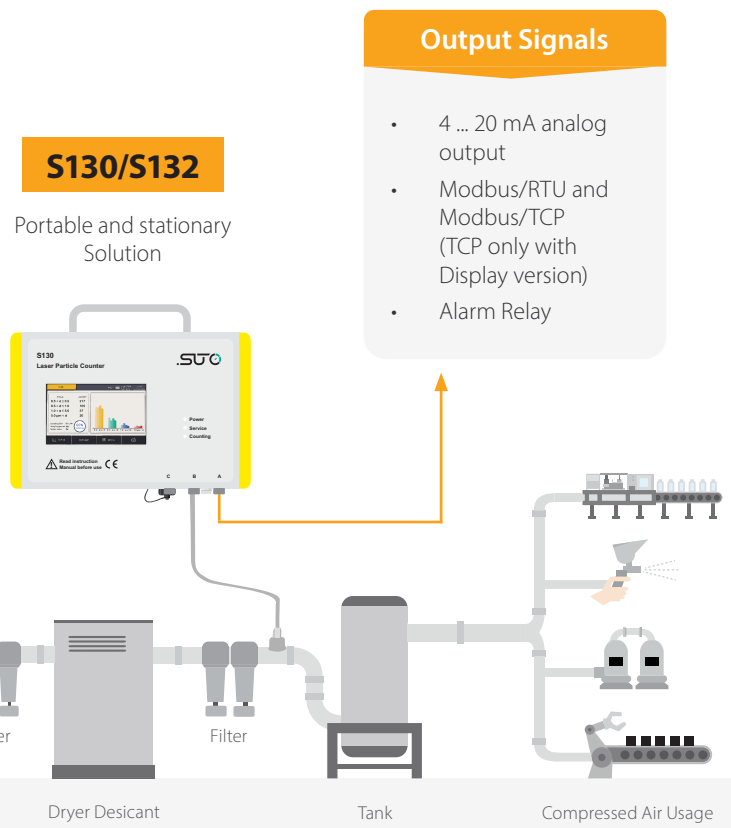



Particulates in Paint Shops

In a modern paint shop, the painting quality highly depends on the quality of the compressed air. Modern paint systems inject the paint into the paint gun, where compressed air is driving the paint through the nozzle. When existing the nozzle, the paint atomizes into a fine and uniformed mist. These tiny paint particles repel each other as they are leaving the nozzle and stick to the object being painted.

Excess impurities in the compressed air will cause the paint particles to "clump", resulting in uneven coverage and an inconsistent finish.

The only way to secure this high-quality painting process is by monitoring the particle concentration of the compressed air supply.



Air Quality Monitoring according to the ISO 8573-1

The ISO 8573-1 defines the compressed air purity classes for particulates in a compressed air system by providing the limit values for each channel.

The S132 Laser Particle Counter measures the channels as defined by the ISO 8573-1:

- $0.1 < d \leq 0.5 \mu\text{m}$
- $0.5 < d \leq 1.0 \mu\text{m}$
- $1.0 < d \leq 5.0 \mu\text{m}$

For these 3 channels, the limit values are defined and divided into classes.

But furthermore, as stated in the ISO 8573, the fourth channel must be measured as well:

- $d > 5.0 \mu\text{m}$

This channel value must be 0 for the classes 0 ... 5, as otherwise the classification falls into class 6 or worse, where a mass concentration is defined as limit values.

Certain industries like the pharmaceutical and food industry requires high-quality compressed air. By meeting the ISO 8573-1 standard requirements you can:

- ✓ **Ensure Process and Product Safety:**
Contaminants mixing with applications effect product results and can create safety concerns.
- ✓ **Prevent production downtime:**
Processes and machines are stopped to find and eliminate the contamination issues.

S130



S132





Technical Data

Measurement

Particle

Measuring range S130: $0.3 < d \leq 5.0 \mu\text{m}$
S132: $0.1 < d \leq 5.0 \mu\text{m}$

Measuring channels S130:
CH1: $0.3 < d \leq 0.5 \mu\text{m}$
CH2: $0.5 < d \leq 1.0 \mu\text{m}$
CH3: $1.0 < d \leq 5.0 \mu\text{m}$
CH4: $5.0 \mu\text{m} < d$ (configurable)
S132:
CH1: $0.1 < d \leq 0.5 \mu\text{m}$
CH2: $0.5 < d \leq 1.0 \mu\text{m}$
CH3: $1.0 < d \leq 5.0 \mu\text{m}$
CH4: $5.0 \mu\text{m} < d$ (configurable)

Counting efficiency according ISO 21501-4 S130:
30 ... 70 % of $d > 0.3 \mu\text{m}$,
90 ... 110 % of $d \geq 0.45 \mu\text{m}$
S132:
30 ... 70 % of $d > 0.1 \mu\text{m}$,
90 ... 110 % of $d \geq 0.3 \mu\text{m}$

Principle of measurement Laser detection

Sensor LED-laser

Consumption

Selectable units $\text{cn}/\text{m}^3, \text{cn}/\text{ft}^3$

Signal / Interface & Supply

Analog output

Signal 4 ... 20 mA (2-wire)

Alarm Switch output, normally open,
max. 40 VDC, 200 mA

Fieldbus

Protocol Modbus/RTU, , Modbus/TCP (with
Display version)

Supply

Voltage supply 24 VDC / 10 W (without Display)
24 VDC / 20 W (with Display)

Current consumption 420 mA (without Display)
840 mA (with Display)

Data interface

USB USB Micro with OTG support

General data

Configuration

Others Device comes pre-configured
Configuration can be done via
on-screen touch

Display

Integrated 5" color touch screen

Data Logger

Storage 100 million measurement values
(optional)

Miscellaneous

Electrical connection 3X M12

Protection class IP65

Process connection 6 mm quick connect (pressurized
version), barb connection (ambient
version)

Material PC, Al alloy

Weight S130: 1.9 kg
S132: 3.2 kg

Dimensions S130: 271 x 205 x 91 mm
S132: 300 x 240 x 120 mm

Operating conditions

Medium Compressed air and gases free of
corrosive, aggressive, caustic and
flammable constituents

Flow rate 2.83 l/min

Sample rate One sample per minute

Medium quality ISO 8573-4

Medium temperature 0 ... +40 °C

Medium humidity < 90 %, no condensation

Operating pressure 0.3 ... 1.5 MPa

Ambient temperature +10 ... +40 °C

Ambient humidity 0 ... 90 % rH

Storage temperature -10 ... +50 °C

Storage humidity < 90 % with no condensation

Transport temperature -30 ... +70 °C Without display
-10 ... +60 °C with display



Ordering

Please use the following tables to assist in placing your order with our sales staff.

Particle Counter for Compressed Air: P = 0.3 ... 1.5 Mpa

Order No.	Description
-----------	-------------

KA66S6041303	S130, Particle Counter for Compressed Air, size range d: $0.3 < d \leq 5.0 \mu\text{m}$, 2.83 l/min
KA66S6041305	S130, Particle Counter for Compressed Air, size range d: $0.3 < d \leq 5.0 \mu\text{m}$, 2.83 l/min, display, logger
KA66S6041308	S132, Particle Counter for Compressed Air, size range d: $0.1 < d \leq 5.0 \mu\text{m}$, 2.83 l/min
KA66S6041309	S132, Particle Counter for Compressed Air, size range d: $0.1 < d \leq 5.0 \mu\text{m}$, 2.83 l/min, display, logger

Accessories

Order No.	Description
-----------	-------------

KA66A5540120	Transport case S120 / S130
KA66A5540116	Transport case S132
KA66A5541204	Zero count filter
KA66R2000130	Calibration particle counter S130
KA66R2000131	Calibration particle counter S132



www.kompauto.com



sales@kompauto.com