



COMPACT MASS FLOW METER FOR OXYGEN

Specially made in Stainless Steel 316L / 1.4404 for usage in Fish Farming and other specific Oxygen applications

Sizes



- DN8
- DN15
- DN20
- DN25
- DN32



SMARTPHONE ANDROID APP
For remote configuration



POINT-OF-USE MEASUREMENT
Monitor machines and air consumers



COMPACT DESIGN
Can be installed anywhere



TOTAL FLOW
No bypass measurement



EASY PROCESS MONITORING
Effective and inexpensive recording



ACCURATE RESULTS
Integrated flow conditioner

Benefits

- ✓ Highly versatile flow and consumption meter for compressed air and technical gases
- ✓ Integrated pressure sensor optional
- ✓ Integrated data logger for measurement recordings as standard feature
- ✓ Various process connection sizes available: DN8, DN15, DN20, DN25 and DN32 (G-inner-thread)
- ✓ Accurate monitoring of gas supplies and consumers
- ✓ Integrated flow conditioner eliminates the need of straight inlet sections

Powerful Pro Version – Flexible Installation

The S418 Thermal Mass Flow Meters offers compressed air flow and gas measurement directly at the point of use.


It comes standard with wireless communication interface to help the user quickly and easily check the flow meter readings or adjust the settings via the SUTO flow meter app.

Improve your compressed air system efficiency, while helping reduce compressed air and gas usage and operating costs by monitoring:

- Flow and Consumption
- Pressure
- Temperature

Connection

Pin assignment connector plug M8




- Every sensor includes 5m M8 cables with open ends
- Sensor with Modbus/RTU or M-Bus include 1 cable
- Sensors with Analog output include 2 cables

Output	Connector	Pin 1	Pin 2	Pin 3	Pin 4
Modbus/RTU	A	D-	-VB	+VB	D+
	B	D-	GND	NA	D+
Analog and Pulse	A	I-	-VB	+VB	I+
	B	I-	P	P	I+
M-Bus	A	M-bus	-VB	+VB	M-bus
	B	M-bus	NA	NA	M-bus
Wire colour		brown	white	blue	black

Gas Monitoring Application

The S418 is ideal for remote locations or high accuracy compressed air flow and gas measurements with its built-in data logger and optional pressure sensing.

The compact flow meters provide accurate gas flow monitoring, helping to discover weak points in the process flow, thus ensuring continuity and profitability.

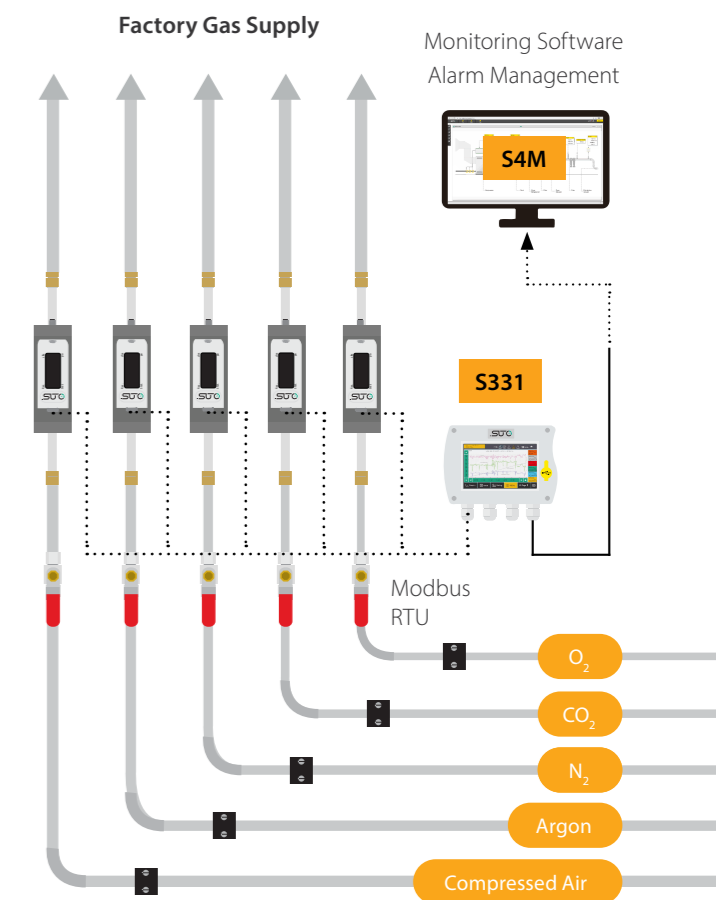



Wireless Connection

The free S4C-FS App offers a unique wireless connection to every SUTO flow meter for online readings and configuration.


Especially during installation and setup all settings can be performed using a smartphone, there is no need to carry a PC and an interface on site. This saves a lot of time and is the easy way to get reliable sensor readings.

Every sensor is protected by default. To perform changes on the flow meter, first a QR code must be scanned.

Flow Conditioner

Asymmetric velocity profiles, swirl, and other factors caused by bends in pipes can lead quickly to inaccurate readings. But sometimes there is not enough space to have straight inlet conditions for accurate readings.


The highly engineered flow conditioner solves this problem. Unlike a standard flow conditions disk, the 3D design of the flow conditioner allows measurements with no additional straight inlet piping at all. Thanks to the innovative mechanical design, the pressure loss is negligible small (<30 hPa), offering high accurate measurements in difficult pipe conditions.

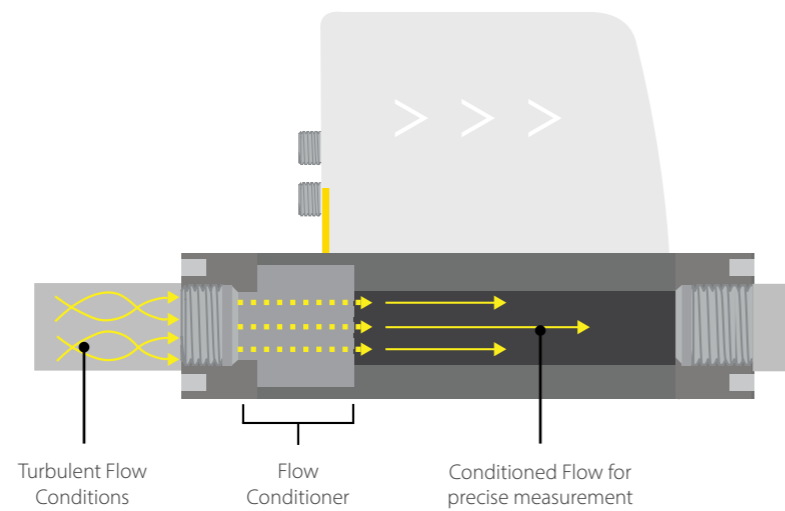


Connect several S418 to Modbus Master

The S418 with Modbus/RTU interface can be easily daisy-chained to a Modbus Master device such as S331 by using RS-485 splitter (KA66A5543310) and the M8 to M12 converter cable (KA66A5530161). Through this method you can add up to 16 flow meters to the master.

Remark: The S331 can maximum provide 10 W power to the connected devices. If more power is required a separate power supply is needed..

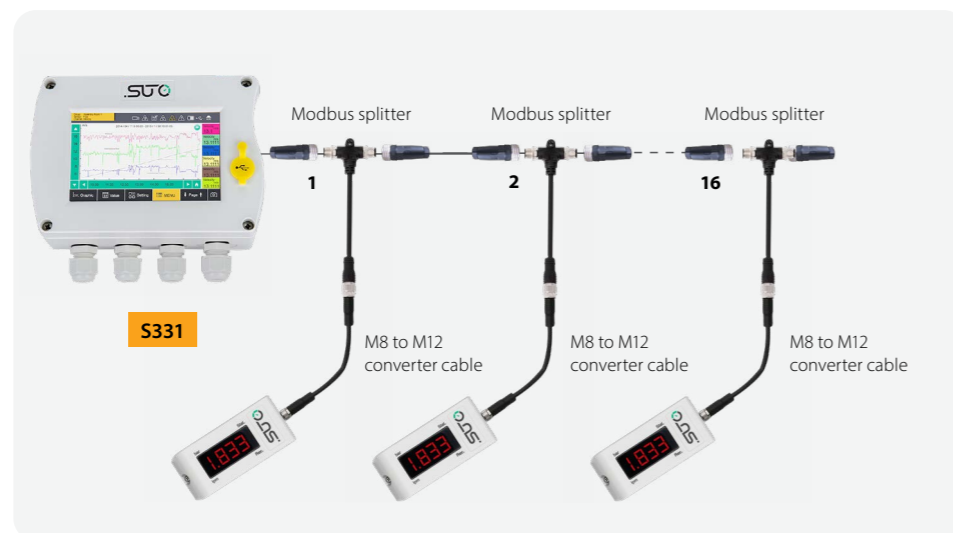

Display Direction

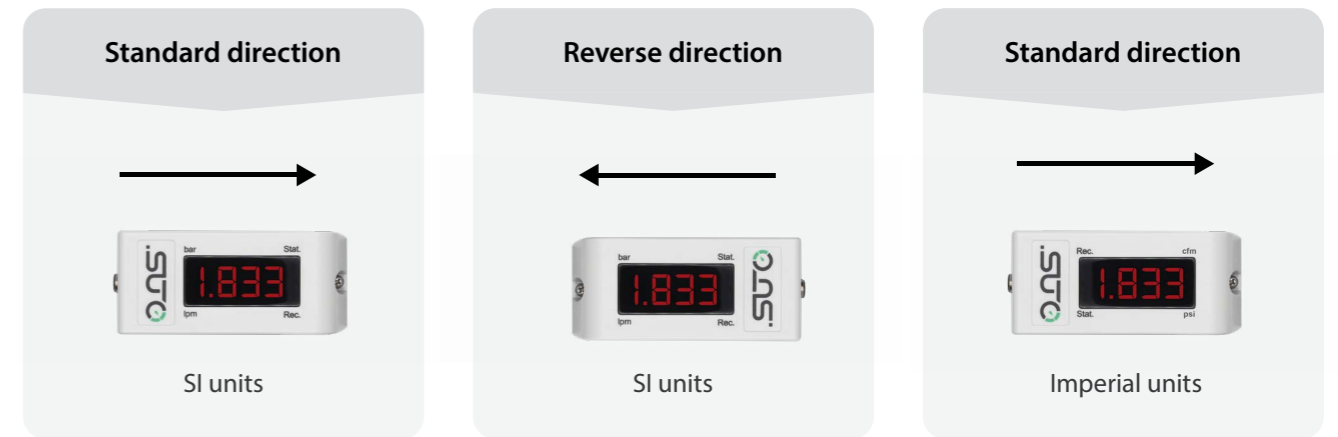

Measuring Range in Air (l/min)

Range	Standard Configuration				
Process connection	DN8	DN15	DN20	DN25	DN32
Standard range (S)	250	1000	2000	3500	6000
Low range (L)	50	200	400	700	1200

Stated measuring ranges for S418 under following conditions:


- Standard flow in air in l/min
- Reference pressure: 1000 mbar
- Reference Temperature: +20 °C

Measuring ranges in Nitrogen are different. Please contact us for details at sales@kompauto.com



Dimensions

Dimensions in mm	a	b	c	d	e
DN8/DN15	35.0	93.0	120.4	35.0	48.0
DN20/DN25	48.0	106.0	178.0	48.0	61.0
DN32	60.0	118.0	222.0	60.0	73.0

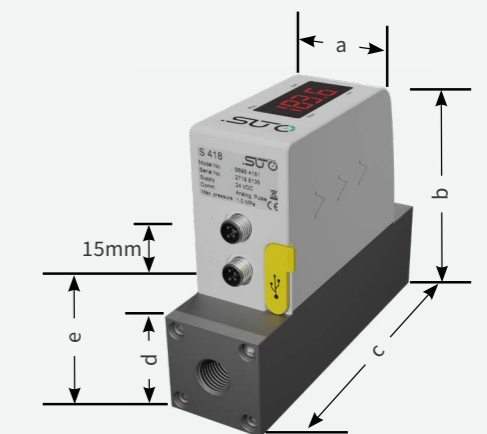

Technical Data

Measurement

Flow

Accuracy	1.5 % o.RDG ±0.3 % FS
Selectable units	l/min, cfm, kg/h, m ³ /h
Measuring range	see table on the previous page
Repeatability	0.5 % o.RDG
Sensor	Thermal mass flow sensor
Sampling rate	10/sec
Turndown ratio	100:1
Response time (t90)	0.5 sec

Consumption

Selectable units	m ³ , ft ³ , l, kg
------------------	--

Pressure

Accuracy	0.5 % FS
Selectable units	bar, psi
Measuring range	0 ... 10 bar(g)
Sensor	Piezoelectric sensor

Reference conditions

Selectable conditions	20 °C 1000 mbar (ISO1217), 0 °C 1013 mbar (DIN1343) freely adjustable
-----------------------	---

Signal / Interface & Supply

Analog output

Signal	4 ... 20 mA (4-wire), isolated
Scaling	0 ... max flow
Load	Max 250 Ω freely adjustable
Update rate	3/sec

Pulse output

Signal	Switch output, normally open, max 30 VDC, 200 mA
Scaling	1 pulse per consumption unit

Fieldbus

Protocol	Modbus/RTU
----------	------------

Supply

Voltage supply	15 ... 30 VDC
Current consumption	120 mA @ 24 VDC

Data interface

Connection	USB micro
------------	-----------

General data

Configuration

Wireless	S4C-FS App for mobile phones
PC Software	S4A PC software for download and data analyzes

Display

Integrated	4 digit LED
------------	-------------

Data Logger

Storage	8 Mio. values
---------	---------------

Material

Process connection	Stainless Steel 316L / 1.4404
Housing	PC + ABS
Sensor	Ceramic, glass coated
Metal parts	Stainless Steel 316L / 1.4404

Miscellaneous

Electrical connection	2 x M8 (4 pole)
Protection class	IP54
Approvals	CE, RoHS, FCC
Process connection	G-thread
Weight	0.45 ... 1.3 kg (depends on model)
Cleaning	Oil and grease free cleaning of the sensor and flowbody at production due to Oxygen use. Delivered in a vacuum sealed package

Operating conditions

Medium	O ₂ , Air, N ₂ , CO ₂ and other gases
Medium temperature	0 ... 50 °C
Medium humidity	< 90 % rH, no condensation
Operating pressure	0 ... 16 bar(g)
Ambient temperature	0 ... 50 °C
Ambient humidity	< 95 % rH
Storage temperature	-30 ... 70 °C
Transport temperature	-30 ... 70 °C

Ordering

Please use the following tables to assist in placing your order with our sales staff.

S418 Compact Thermal Mass Flow Meter (SS316L / 1.4404) for Oxygen use

Order No.	Description
	S418-SS Compact Thermal Mass Flow Meter with integrated data logger, G inner thread, 24 VDC, 5 m cable with M8 connector and open ends included

Size + Pressure sensor option

KA66S418SS01	DN8
KA66S418SS02	DN15
KA66S418SS03	DN20
KA66S418SS04	DN25
KA66S418SS05	DN32
KA66S418SS06	DN8, Pressure sensor 10 bar(g)
KA66S418SS07	DN15, Pressure sensor 10 bar(g)
KA66S418SS08	DN20, Pressure sensor 10 bar(g)
KA66S418SS09	DN25, Pressure sensor 10 bar(g)
KA66S418SS10	DN32, Pressure sensor 10 bar(g)

Range

KA66000A1465	Standard range version
KA66000A1453	Low range version

Output

KA66000A1455	S418: Analog 4 ... 20 mA, Pulse output
KA66000A1456	S418: Modbus/RTU output
KA66000A1457	S418: M-Bus output

Fluid Medium 1

KA66000A1007	Air
KA66000A1008	CO ₂
KA66000A1009	O ₂ (Oil- & grease-free cleaned)
KA66000A1010	N ₂
KA66000A1011	N ₂ O
KA66000A1012	Argon
KA66000A1013	Natural Gas
KA66000A1014	H ₂ (Real gas calibration)
KA66000A1015	Other Gas (Please specify)
KA66000A1016	He (Real gas calibration)
KA66000A1017	C ₃ H ₈

Fluid Medium 2 (same selections as above)

KA66000A1003	No second gas
--------------	---------------

Units

KA66000A1467	With SI units
KA66000A1459	With imperial units

Display direction

KA66000A1463	Standard display direction (left to right)
KA66000A1461	Reverse display direction

S418 Accessories

Order No.	Description
KA66A5540109	Mains power supply 100-240 VAC / 24 VDC, 0.5 A, 2 m cable with M8 connector
KA66A5530137	Connection cable to S551, 5 m
KA66M5997020	S4A data analysis software, for data logger S418
KA66A5530161	M8 to M12 converter cable for Modbus splitter
KA66A5530171	Cable to connect power bank, 1.8 m, USB-C connector for power bank, M8 connector
KA66A5543310	RS-485 / Modbus splitter

Mobile Power

S418 powered by power bank with connection cable KA66A5530171

Note: power bank must be sourced locally due to shipping restrictions [USB-C, 20 V, min. 100 mA]



Order example

S418-SS-DN25, Standard range, Modbus/RTU, O₂, No second gas, SI units, Standard display direction

KA66S418SS04	S418-SS, DN25 (without pressure sensor option)
KA66000A1465	Standard range version
KA66000A1456	S418: Modbus/RTU output
KA66000A1009	O ₂ (Oil- & grease-free cleaned)
KA66000A1003	No second gas
KA66000A1467	With SI units
KA66000A1463	Standard display direction (left to right)



Our offices



Kompauto Nordic AB

Fläderstigen 1 | Prästavägen 12
771 43 Ludvika | 224 78 Lund

Sweden



Kompauto Norway AS

Ytrebygdsvegen 37
5251 Søreidgrend

Norway

sales@kompauto.com

www.kompauto.com

Tel.SE +46 10 130 10 00

Tel.NO +47 55 55 86 99

Tel.DK +45 78 74 54 90



INSTRUMENTS

VALVES